


BINTALK™ Pro Quick Install Guide

1

Turn on the BinTalk Pro


Open the solar door and slide the power switch up. Power is the right switch. (The left switch, HBand/LBand should be up=HBand).

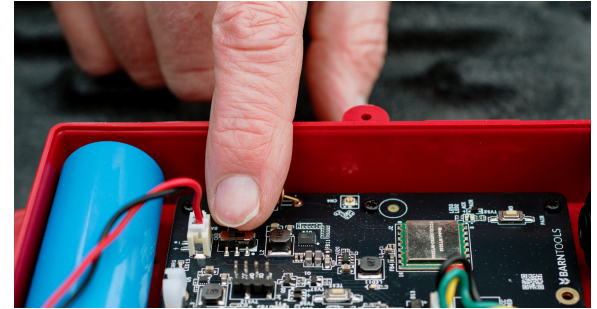

2

Connect your BinTalk Pro

Open your BarnTalk app. If you don't see the BinTalk sensor listed under your Gateway, tap the gear icon and choose "Add Sensor".

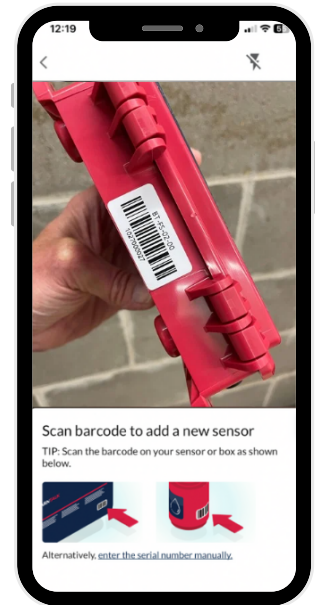

3


Enter your BinTalk settings

Follow the prompts in the app to fill out your bin details. We'll walk you through the rest with a few easy steps!

4

Secure your sensor to the bin collar

Attach bracket near the lid's hinges. Tighten top setscrew to clamp on collar, adjust lower setscrew so bracket is vertical. Lock both lock nuts.

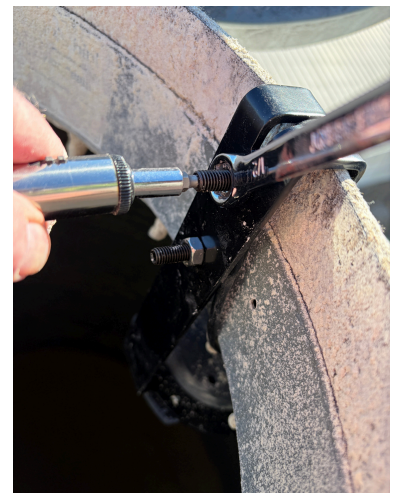

NOTE: Test your gateway connection (wait ~15-20 mins after pairing): Open the solar panel cover and press the PAIR button (lower right side).



If **'ACK' light flashes green** BinTalk Pro is connected to your Gateway



If **'PAIR' flashes red**, re-pair or contact Support at 855-580-0058.

Just 2 More Steps



5

Secure the solar panel

- Clip the solar panel on the collar facing **the most sunlight**, add screw as needed
- **Route the cord outside the bin** to prevent it from getting pinched
- Assure the **lid closes freely**



6

Label your bin

Use a permanent marker to label the bin number and serial number. Stick it onto your bin, and you're all set!



ADDITIONAL SUPPORT RESOURCES:



Scan with
Phone Camera

For more info on **BinTalk Pro**, scan the QR code.



Help Center and FAQs: support.barntools.com



Email our support team: support@barntools.com



Call Toll Free: **855-580-0058**

During the hours of 8 AM - 5 PM CST Monday-Friday